


## HG150300 系列

HG150300 系列过孔电滑环,内孔 150mm,外径 300mm,适用于通径小于 150mm 的旋转机电系统,标准功率环 20A/环,最大 48 环,信号环 5A/环,最大 96 环,用于 360 度旋转系统中传输功率或信号。多用于挤奶机转盘,自动灌封机,软管生产设备等。



### 图纸尺寸

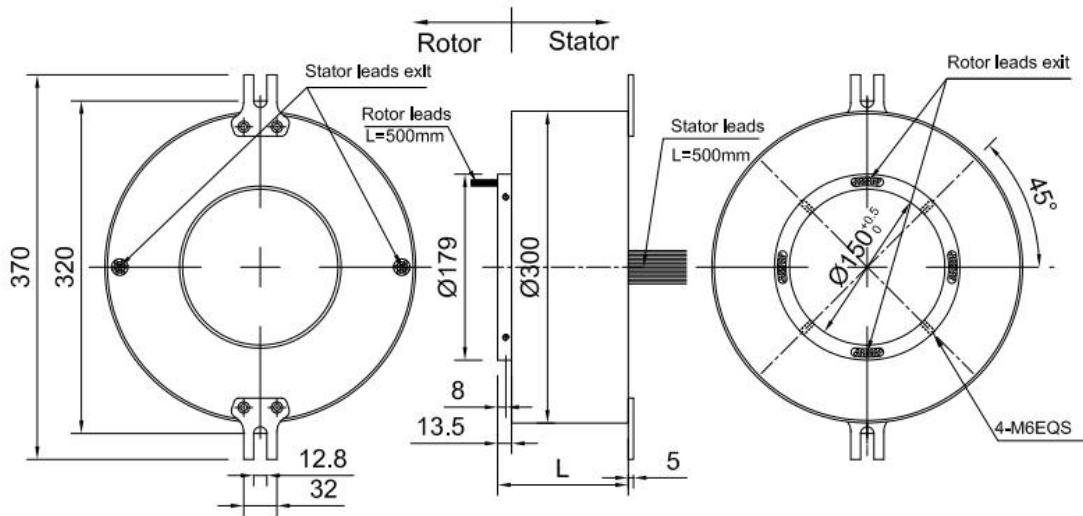

### 型号列表

型号	功率环 (10A/15A/20A)	信号环 (5A)	长度 (mm)
HG150300-6P	6	-	126
HG150300-12S	-	12	126
HG150300-12P	12	-	168
HG150300-6P/12S	6	12	168
HG150300-24S	-	24	168
HG150300-18P	18	-	210
HG150300-12P/12S	12	12	210
HG150300-6P/24S	6	24	210
HG150300-36S	-	36	210
HG150300-24P	24	-	252
HG150300-18P/12S	18	12	252
HG150300-12P/24S	12	24	252
HG150300-6P/36S	6	36	252
HG150300-48S	-	48	252
HG150300-30P	30	-	294
HG150300-24P/12S	24	12	294
HG150300-18P/24S	18	24	294

HG150300-12P/36S	12	36	294
HG150300-6P/48S	6	48	294
HG150300-60S	-	60	294
HG150300-36P	36	-	336
HG150300-30P/12S	30	12	336
HG150300-24P/24S	24	24	336
HG150300-18P/36S	18	36	336
HG150300-12P/48S	12	48	336
HG150300-6P/60S	6	60	336
HG150300-72S	-	72	336
HG150300-42P	42	-	378
HG150300-36P/12S	36	12	378
HG150300-30P/24S	30	24	378
HG150300-24P/36S	24	36	378
HG150300-18P/48S	18	48	378
HG150300-12P/60S	12	60	378
HG150300-6P/72S	6	72	378
HG150300-84S	-	84	378
HG150300-48P	48	-	420
HG150300-42P/12S	42	12	420
HG150300-36P/24S	36	24	420
HG150300-30P/36S	30	36	420
HG150300-24P/48S	24	48	420
HG150300-18P/60S	18	60	420
HG150300-12P/72S	12	72	420
HG150300-6P/84S	6	84	420
HG150300-96S	-	96	420

## 技术参数

电气参数			机械参数	
	功率	信号	最大转速	0-250 转/分
额定电压	0~380VAC/VDC	0~240VAC/VDC	工作温度	-20°C~+80°C
额定电流	10A/15A/20A/环	5A/环	工作湿度	0-85% RH 或更高
导线规格	镀锡铁氟龙 AWG16AWG14	镀锡铁氟龙 AWG22	外壳材质	金属
绝缘电阻	≥1000MΩ/500VDC	≥500MΩ/500VDC	接触材质	贵金属
绝缘强度	1000VAC@50HZ, 60S	500VAC@50HZ, 60S	防护等级	IP54
导线长度	标准 500mm(可调节)			
动态电阻	<0.01Ω			