


HG180332 系列

HG180332 系列是超薄型过孔滑环，内孔 180mm，外径 332mm，适用于通径小于 180mm 的旋转机电系统，标准功率环 20A/环，最大 48 环，信号环 5A/环，最大 96 环，用于 360 度旋转系统中传输功率或信号。



图纸尺寸

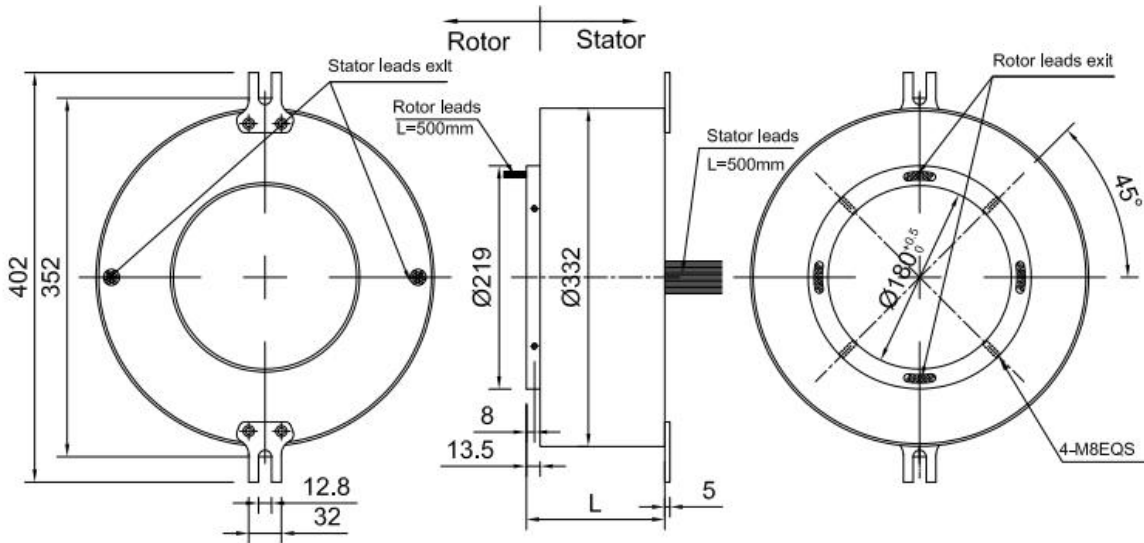

型号列表

型号	功率环 (10A/15A/20A)	信号环 (5A)	长度 (mm)
HG180332-6P	6	-	136
HG180332-12S	-	12	136
HG180332-12P	12	-	184
HG180332-6P/12S	6	12	184
HG180332-24S	-	24	184
HG180332-18P	18	-	232
HG180332-12P/12S	12	12	232
HG180332-6P/24S	6	24	232
HG180332-36S	-	36	232
HG180332-24P	24	-	280
HG180332-18P/12S	18	12	280
HG180332-12P/24S	12	24	280
HG180332-6P/36S	6	36	280
HG180332-48S	-	48	280
HG180332-30P	30	-	322
HG180332-24P/12S	24	12	322
HG180332-18P/24S	18	24	322

HG180332-12P/36S	12	36	322
HG180332-6P/48S	6	48	322
HG180332-60S	-	60	322
HG180332-36P	36	-	364
HG180332-30P/12S	30	12	364
HG180332-24P/24S	24	24	364
HG180332-18P/36S	18	36	364
HG180332-12P/48S	12	48	364
HG180332-6P/60S	6	60	364
HG180332-72S	-	72	364
HG180332-42P	42	-	406
HG180332-36P/12S	36	12	406
HG180332-30P/24S	30	24	406
HG180332-24P/36S	24	36	406
HG180332-18P/48S	18	48	406
HG180332-12P/60S	12	60	406
HG180332-6P/72S	6	72	406
HG180332-84S	-	84	406
HG180332-48P	48	-	448
HG180332-42P/12S	42	12	448
HG180332-36P/24S	36	24	448
HG180332-30P/36S	30	36	448
HG180332-24P/48S	24	48	448
HG180332-18P/60S	18	60	448
HG180332-12P/72S	12	72	448
HG180332-6P/84S	6	84	448
HG180332-96S	-	96	448

技术参数

电气参数			机械参数	
	功率	信号	最大转速	0-250 转/分
额定电压	0~380VAC/VDC	0~240VAC/VDC	工作温度	-20°C~+80°C
额定电流	10A/15A/20A/环	5A/环	工作湿度	0-85% RH 或更高
导线规格	镀锡铁氟龙 AWG16AWG14	镀锡铁氟龙 AWG22	外壳材质	金属
绝缘电阻	≥1000MΩ/500VDC	≥500MΩ/500VDC	接触材质	贵金属
绝缘强度	1000VAC@50HZ, 60S	500VAC@50HZ, 60S	防护等级	IP54
导线长度	标准 500mm(可调节)			
动态电阻	<0.01Ω			