


HG60135 系列

HG60135 系列空心轴导电滑环，孔径 60mm，外径 135mm，适用于通径小于 60mm 的旋转机电系统，标准功率环 20A/环，最大 48 环，信号环 5A/环，最大 96 环，用于 360 度传输功率或信号。大孔径滑环多用于烘干设备，旋转木马，游乐骑乘旋转设施。



图纸尺寸

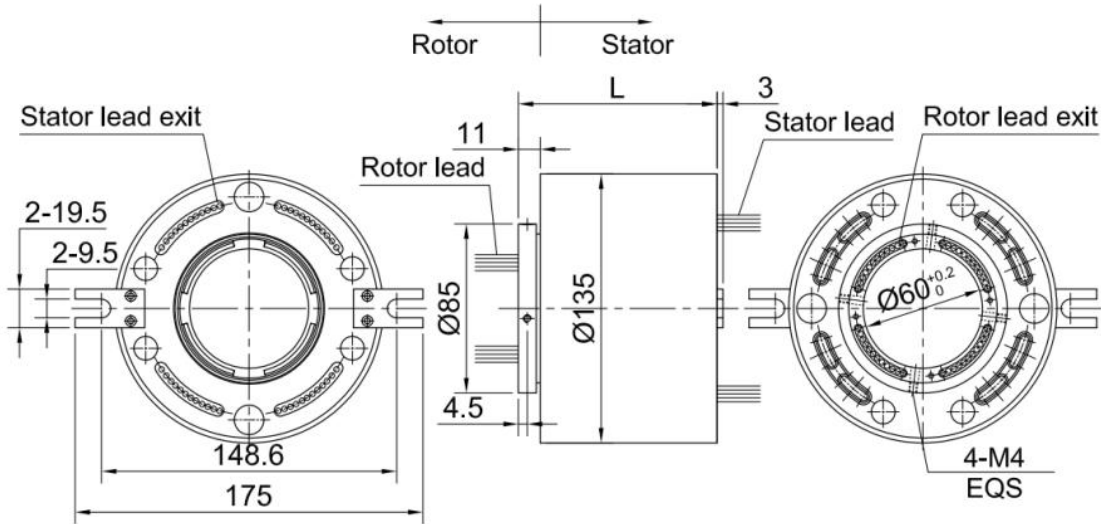

型号列表

型号	功率环 (10A/15A/20A)	信号环 (5A)	长度 (mm)
HG60135-6P	6	-	77.5
HG60135-12S	-	12	77.5
HG60135-12P	12	-	107.5
HG60135-6P/12S	6	12	107.5
HG60135-24S	-	24	107.5
HG60135-18P	18	-	137.5
HG60135-12P/12S	12	12	137.5
HG60135-6P/24S	6	24	137.5
HG60135-36S	-	36	137.5
HG60135-24P	24	-	167.5
HG60135-18P/12S	18	12	167.5
HG60135-12P/24S	12	24	167.5
HG60135-6P/36S	6	36	167.5
HG60135-48S	-	48	167.5
HG60135-30P	30	-	197.5
HG60135-24P/12S	24	12	197.5
HG60135-18P/24S	18	24	197.5
HG60135-12P/36S	12	36	197.5

HG60135-6P/48S	6	48	197.5
HG60135-60S	-	60	197.5
HG60135-36P	36	-	227.5
HG60135-30P/12S	30	12	227.5
HG60135-24P/24S	24	24	227.5
HG60135-18P/36S	18	36	227.5
HG60135-12P/48S	12	48	227.5
HG60135-6P/60S	6	60	227.5
HG60135-72S	-	72	227.5
HG60135-42P	42	-	257.5
HG60135-36P/12S	36	12	257.5
HG60135-30P/24S	30	24	257.5
HG60135-24P/36S	24	36	257.5
HG60135-18P/48S	18	48	257.5
HG60135-12P/60S	12	60	257.5
HG60135-6P/72S	6	72	257.5
HG60135-84S	-	84	257.5
HG60135-48P	48	-	287.5
HG60135-42P/12S	42	12	287.5
HG60135-36P/24S	36	24	287.5
HG60135-30P/36S	30	36	287.5
HG60135-24P/48S	24	48	287.5
HG60135-18P/60S	18	60	287.5
HG60135-12P/72S	12	72	287.5
HG60135-6P/84S	6	84	287.5
HG60135-96S	-	96	287.5

技术参数

电气参数			机械参数	
	功率	信号	最大转速	0-250 转/分
额定电压	0~380VAC/VDC	0~240VAC/VDC	工作温度	-20°C~+80°C
额定电流	10A/15A/20A/环	5A/环	工作湿度	0-85% RH 或更高
导线规格	镀锡铁氟龙 AWG16AWG14	镀锡铁氟龙 AWG22	外壳材质	工程塑料
绝缘电阻	≥1000MΩ/500VDC	≥500MΩ/500VDC	接触材质	贵金属
绝缘强度	500VAC@50HZ, 60S	500VAC@50HZ, 60S	防护等级	IP51
导线长度	标准 500mm(可调节)			
动态电阻	<0.01Ω			